


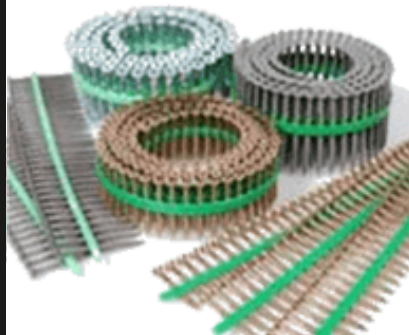

OEM / MARINE / TRAILER / RV ASSEMBLY

RSM644SFL

M6 METRIC SELF-DRILL TYPE 410 STAINLESS COLLATED COIL

The only collated metric screw built for wood-to-aluminum connections. Self-drilling Type 410 stainless in M6 sizing drives wood and composite flooring directly into aluminum frames in one pass. No pre-drill, no clearance step, no extra pass on the line.

- No pre-drill required into steel or aluminum frames
- Type 410 stainless steel for marine and outdoor OEM environments
- M6 metric sizing meets OEM engineering specs exactly
- Self-tapping thread pulls the board flush to the frame in one pass
- 100-screw coil format, 18 coils per box, continuous production feed
- Runs on the FLVL43 floor-level driver for stand-up operation
- No competitor equivalent in a collated format

SPECIFICATIONS

Part Number: RSM644SFL **Size:** M6 x 44mm (#14 x 1-3/4") **Material:** Stainless Steel, Type 410
Thread: Self-tapping **Tip:** Self-drilling **Drive:** #3 Square **Collation:** Coil
Box Quantity: 1,800 (18 coils x 100 screws) **Fastens:** Wood or composite to steel or aluminum **UPC:** 756793018936

KEY SPECS AT A GLANCE

Size	M6 x 44mm (#14 x 1-3/4")
Material	Type 410 Stainless Steel
Drive	#3 Square
Tip	Self-drilling
Box Qty	1,800 (18 coils per box)
Per Coil	100 screws
Application	Wood or composite to steel / aluminum

SOLE-SOURCE CATEGORY

No competitor equivalent exists in a collated format for this application. Customers running RSM644SFL on the line have no direct alternative.

COMPATIBLE TOOL

FLVL43 Floor Level Power Driver

Stand-up, floor-level auto-feed for metal applications. 100-screw coil. No bending over the deck across a full production shift.

NO PRE-DRILL

Self-drilling tip bores through wood or composite and into aluminum in a single pass, eliminating a full tool-change step per fastener.

SOLE-SOURCE POSITION

No competitor offers a collated coil format for this application. Once on the line, there is no direct drop-in alternative.

OEM-GRADE CORROSION RESISTANCE

Type 410 stainless rated for marine and outdoor OEM environments: salt air, humidity, and chemical exposure on the production floor.

Available by Quote Only
Contact Muro for volume and distributor pricing

1.800.665.6876

muro.com