


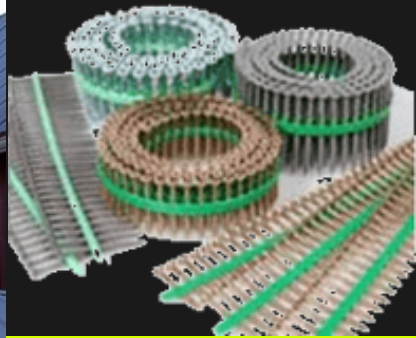

METAL ROOFING / METAL V

SELF-DRILLING STRIP. NO LOOSE FASTENERS ON A PITCHED ROOF.

Self-drilling lock head screws in collated strip format for metal roofing panels, wall skinning, and light gauge steel connections. 25 screws loaded in the CH7280 Metal Pro II. The fastener is already in the gun before you reach the panel.

- Self-drilling tip bores through light gauge steel in one pass. No pilot hole.
- Lock head seats flat on the panel surface. No raised edge.
- Fine thread engineered for metal-to-metal engagement
- 25 screws per strip on CH7280. Move down the panel without stopping.
- Rotating CH7280 housing for tight corners and angled drives
- Two nose lengths: CH7280LU (1" to 1-1/2") / CH7280SU (5/8" to 3/4")
- #2 Square drive. Full torque delivery, no cam-out.
- Bright zinc coating for standard outdoor exposure

SYSTEM SPECIFICATIONS

SS0100BMP: #10 x 1" Lock Head Self-Drill Fine Thread BZ 2,000/box

SS0114BMP: #10 x 1-1/4" Lock Head Self-Drill Fine Thread BZ 2,000/box

Drive: #2 Square **Tool:** CH7280LU (1"-1-1/2") / CH7280SU (5/8"-3/4") **Strip**

Load: 25 screws

THE SYSTEM

CH7280 Metal Pro II

LU: 1" to 1-1/2". SU: 5/8" to 3/4". 25-screw strip. Rotating housing.

SS0100BMP

\$110.00

#10 x 1" Lock Head BZ Strip 2,000/box

SS0114BMP

\$121.00

#10 x 1-1/4" Lock Head BZ Strip 2,000/box

STRIP VS LOOSE ON A SLOPE

Loading screws one at a time on a pitched metal panel is the slowest part of the install. 25 screws preloaded in the CH7280 means the fastener is already in the gun. No fumbled screws sliding off the edge.

ALSO USED IN

Metal Wall Skinning / Sheet Metal to Steel
Steel Framing / HVAC Ductwork

SS SERIES

METAL ROOFING / WALL SKINNING SELF-DRILL LOCK HEAD BRIGHT ZINC STRIP

Self-drilling fine thread lock head strip screws for metal roofing and light gauge steel connections. Runs on CH7280 Metal Pro II (25 per fill). Lock head sits flat on the panel. No pilot hole required.

- Self-drilling tip. One pass through light gauge steel.
- Lock head: flat seating, no raised edge on panel surface
- Fine thread for clean metal-to-metal engagement
- Bright zinc for standard outdoor exposure
- CH7280LU: 1" to 1-1/2" / CH7280SU: 5/8" to 3/4"
- Rotating CH7280 housing for tight corners and angles

ORDERING REFERENCE

SS0100BMP #10 x 1" Lock Head Self-Drill BZ Strip 2,000/box \$110.00

SS0114BMP #10 x 1-1/4" Lock Head Self-Drill BZ Strip 2,000/box \$121.00

TOOL REFERENCE

CH7280LU Long nose. Screw range 1" to 1-1/2". 25-screw strip. #2 Square. Rotating housing.

CH7280SU Short nose. Screw range 5/8" to 3/4". 25-screw strip. #2 Square. Rotating housing.

KEY SPECS AT A GLANCE

Thread	Fine thread
Head	Lock Head
Drive	#2 Square
Tip	Self-drilling
Coating	Bright Zinc
Box Qty	2,000 per box
Strip load	25 per fill (CH7280)

CH7280 METAL PRO II

Two nose options: LU for 1" to 1-1/2" screws, SU for 5/8" to 3/4". Rotating housing adapts to tight corners and angled panel runs. 25-screw strip loads in seconds.

COMPATIBLE TOOLS

CH7280LU (1"–1-1/2", 25/fill)

CH7280SU (5/8"–3/4", 25/fill)